

RTJ400 OPERATION











CHAPTER 2


Glossary of Symbols

Board Faces and Edges The following symbols/icons are used throughout this user guide. They indicate:


- which side of a board faces out when clamped in the jig
- which edge goes against the sidestop
- which board faces are in or out when assembled as a box.

Dashed line symbols indicate the other side of the board hidden from view. **Note: Before you place the boards in the jig, you must mark them with the appropriate symbols.**

-  Outside face of box
-  Inside face of box
-  Either face of box
-  Outside face of box
on other side of board, hidden from view
-  Inside face of box
on other side of board, hidden from view
-  Either face of box
on other side of board, hidden from view
-  This edge against sidestop
-  This edge against sidestop
-  This edge against sidestop
on other side of board, hidden from view
-  This edge against sidestop
on other side of board, hidden from view




Watch the Online Instructional Video




Scan QR Code


Reduce your learning time dramatically! Stream to your smart phone or tablet to use in your workshop while you're working. See Instructional Videos section in Support menu at leightools.com or scan QR code for instant video.

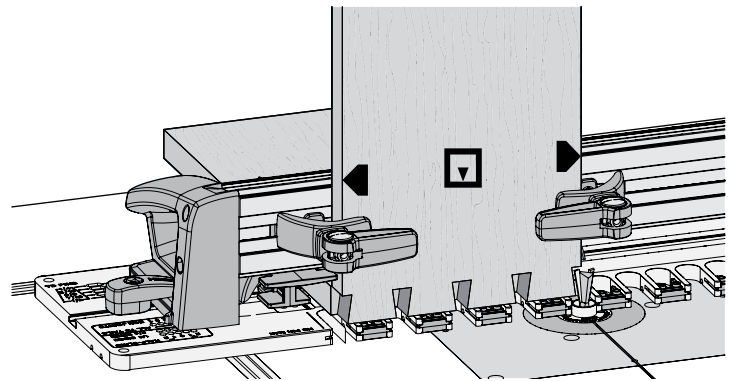

2-1 Icons such as the one used on the board above indicate which side of the board faces away from the operator when clamped in jig, and which faces are in or out when assembled.

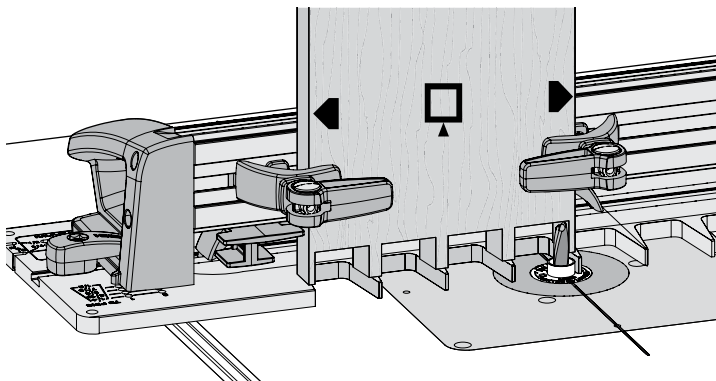

2-2 Note: Because through dovetail pin and tail boards are rotated and clamped with the same face against the frame, both side edges are alternately used against the side stop.

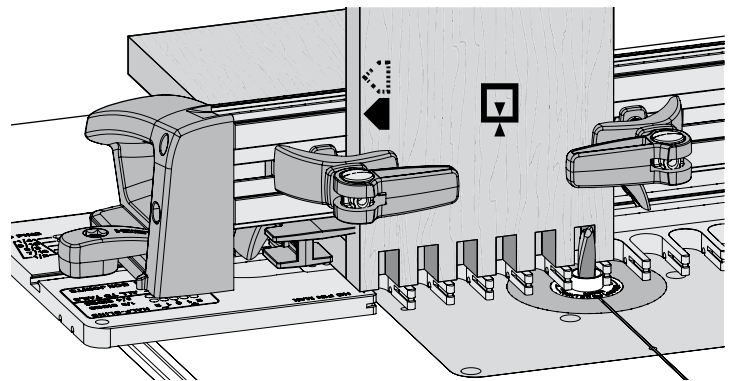

2-3 Box joint boards are clamped against the frame both face in and face out for alternate end cuts. With box joints, the same side edge always goes against the side stop. ■

IMPORTANT NOTE

ROUTER SPEED: Leigh Router Bits work best when the router is running at full speed!